

## Plywood for Transportation

### Epoxy Coated Plywood

The epoxy coated plywood are used for the lining, walls and tank top of the reefer trailer or container.

Painted with solvent free epoxy paint.

Material: Combi plywood, birch, poplar plywood


Face: Painted with solvent free epoxy paint abt. 360 g/m<sup>2</sup> with plastic granulate for smooth or non-slip surface.

Colour: light grey

Size: 600\*2400mm, 750x2400 mm, 1220\*2440mm, 1525\*2500mm

Thickness: 4-50mm

Glue: E0, E1,E2

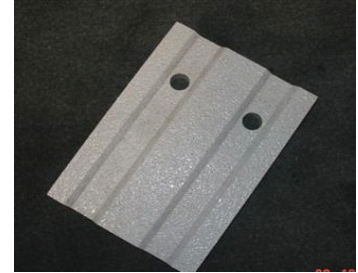

### Phenolic Film faced plywood

The phenolic film faced plywood are used for the floor of the reefer trailer.

Painted with solvent free epoxy paint.

Material: Combi plywood, birch, poplar plywood


Face: Surface covered with a strong hexagonal phenolic film abt. 240 g/m<sup>2</sup>.

Colour: brown, black

Size: 600\*2400mm, 1220\*2440mm, 1525\*2500mm

Thickness: 4-50mm

Glue: WBP

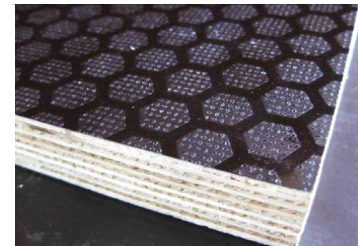

### Applications

The Epoxy coated plywood and phenolic film faced plywood are widely used for lining, floor and tanktop of the refrigerated cargo holds. For walls, ceilings, hatches, flooring, lining, tank top of the refrigerated cargo holds; reefers, fishing vessels.



### Features

- ※ Easy and quick to install
- ※ Resistant against high-pressure water

For information and price contact with Customer Service Rep or your Sales Representative.